



Shenzhen Tian Hai Test Technology Co., Ltd.

TEST REPORT
MEASUREMENT AND TEST REPORT

For

OpenVox Communication Co., Ltd

Room 624, 6/F, Tsinghua Information Port, Qingqing Road, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Model: SWG-3008

2022-12-14

This Report Concerns:

☒ Original Report

Equipment Type:

Wireless Gateway

Test Engineer:

Blue Hu/ *Blue Hu*

Report Number:

TH2212100-C01-R01

Test Date:

2022-12-09 to 2022-12-14

Reviewed By:

Neo Dong/ *Neo Dong*

Approved By:

Bing Lee/ *Bing Lee*

Prepared By:

Shenzhen Tian Hai Test Technology Co., Ltd.

125-126, No.66, Zhangge Road, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-86615100

Fax: +86-755-86615105

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen Tian Hai Test Technology Co., Ltd.



TABLE OF CONTENTS

1 - GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 MEASUREMENT UNCERTAINTY	5
1.5 MEASURING DEVICE AND TEST EQUIPMENT	6
2 - SUMMARY OF TEST RESULTS	8
3.- CONDUCTED EMISSION FROM THE AC MAINS POWER PORT	9
3.1 LIMIT	9
3.2 TEST PROCEDURE	9
3.3 TEST SETUP	9
3.4 TEST RESULTS	9
4 - RADIATED DISTURBANCES	12
4.1 LIMIT	12
4.2 TEST SETUP	12
4.3 TEST PROCEDURE	13
4.4 TEST RESULT	14
5 - HARMONIC CURRENT EMISSION	18
5.1 TEST STANDARD	18
5.2 TEST SETUP	18
5.3 TEST PROCEDURE	18
5.4 OPERATING CONDITION OF EUT	18
5.5 TEST RESULT	18
6 - VOLTAGE FLUCTUATIONS & FLICKER	19
6.1 LIMIT	19
6.2 TEST SETUP	19
6.3 TEST PROCEDURE	19
6.4 TEST RESULT	19
7 - GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST	20
8 - ELECTROSTATIC DISCHARGE IMMUNITY TEST	21
8.1 TEST SETUP	21
8.2 TEST STANDARD	21
8.3 SEVERITY LEVELS AND PERFORMANCE CRITERION	21
8.4 TEST PROCEDURE	21
8.5 TEST RESULT	22
9 - RF FIELD STRENGTH SUSCEPTIBILITY TEST	23
9.1 TEST SETUP	23
9.2 TEST STANDARD	23
9.3 SEVERITY LEVELS AND PERFORMANCE CRITERION	23
9.4 TEST PROCEDURE	23
9.5 TEST RESULT	24
10 - ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	25
10.1 TEST SETUP	25
10.2 TEST STANDARD	25
10.3 SEVERITY LEVELS AND PERFORMANCE CRITERION	25
10.4 TEST PROCEDURE	25
10.5 TEST RESULT	25
11 - SURGE IMMUNITY TEST	27
11.1 TEST SETUP	27
11.2 TEST STANDARD	27
11.3 SEVERITY LEVELS AND PERFORMANCE CRITERION	27
11.4 TEST PROCEDURE	27



11.5 TEST RESULT	27
12 - INJECTED CURRENTS SUSCEPTIBILITY TEST	29
12.1 TEST SETUP	29
12.2 TEST STANDARD	29
12.3 SEVERITY LEVELS AND PERFORMANCE CRITERION	29
12.4 TEST PROCEDURE	29
12.5 TEST RESULT	30
13 - VOLTAGE DIPS AND INTERRUPTIONS TEST	31
13.1 TEST SETUP	31
13.2 TEST STANDARD	31
13.3 SEVERITY LEVELS AND PERFORMANCE CRITERION	31
13.4 TEST PROCEDURE	31
13.5 TEST RESULT	31
APPENDIX A - EUT PHOTOGRAPHS	33





1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **OpenVox Communication Co., Ltd**

Address: Room 624, 6/F, Tsinghua Information Port, Qingqing Road, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Manufacturer: **OpenVox Communication Co., Ltd**

Address: Room201, Building I, Jinchangda, Building 00082, Shangwei Industrial Zone, Zhangkengjing Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

General Description of E.U.T

EUT Description: **Wireless Gateway**

Trade mark: OpenVox

Model No.: SWG-3008

Rating: DC 12V/3A

Adapter: N/A

Battery: N/A

Sample No. TH2212100#

Note: N/A

301893-1/52

Test Mode		Test Voltage
1	TX transmit	DC 12V/3A

55032/55035

Test Mode		Test Voltage
2	Normal Working	DC 12V/3A

Remark: * The test data gathered are from the production sample provided by the manufacturer.



1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with

ETSI EN 301 489-1

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU

ETSI EN 301 489-52

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 52: Specific conditions for Cellular Communication User Equipment (UE) radio and ancillary equipment; Harmonised Standard for ElectroMagnetic Compatibility

EN55032: 2015/A11:2020

Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035:2017/A11:2020

Electromagnetic compatibility of multimedia equipment - Immunity requirements

EN IEC 61000-3-2:2019

Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16 A per phase

EN 61000-3-3:2013/A1:2019

Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection

1.3 Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3(2019-11) and ETSI EN 301 489-17 V3.2.4(2020-09)

1.4 Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.35dB	N/A
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	5.78dB	N/A
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 6GHz)	4.62	N/A



1.5 Measuring device and test equipment

The following test requirements were used during test:

Conducted Emission				⚙
Kind of Equipment	Manufacturer	Type	S/N	Calibrate until
EMI Test Receiver	R&S	ESRP3	102242	2023-11-13
L.I.S.N	Schwarzbeck	NNLK 8128	5089	2023-11-13
8-Wire ISN CAT6	Schwarzbeck	NTFM 8158	231	2023-11-13
Pulse Limiter	Schwarzbeck	VTSD 9561-F	847	2023-11-13
Test software	FALA	/	EMC-CON 3A1.1	/
Radiated Emission (3m)				⚙
EMI Test Receiver	R&S	ESR7	102333	2023-11-13
MXA Signal Analyzer	Keysight	N9020A	MY51281805	2023-04-15
Bilog Antenna	Schwarzbeck	VULB 9168	01148	2023-11-20
Pre-Amplifier	Schwarzbeck	BBV 9718 B	00109	2023-11-13
Pre-Amplifier	Schwarzbeck	BBV 9743 B	00253	2023-11-13
Pre-Amplifier	GUANGGU ELECTRONIC	GLNA18-40GK-5372	20210331001	2023-11-13
Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00148	2023-11-13
Horn Antenna	Schwarzbeck	BBHA 9120	02379	2023-11-20
Test software	FALA	/	FA-03A2 RE	/
Harmonics & Flicker				⚙
5kVA AC Power Source	AMETEK CTS	5001iX-CTS-400	2046A03237	2023-11-13
Signal Conditioning Unit	AMETEK CTS	PACS-1	2046A03238	2023-11-13
Test software	AMETEK CTS	CTS 4	Version 4.26.0	/
ESD				⚙
ESD Simulator	TESEQ	NSG 437	1569	2023-11-15
RS				⚙
Signal generator	R&S	SMB 100A	113650	2023-04-15
Power meter	Agilent	E4417A	MY45100899	2023-04-15
Power sensor	Agilent	E9321A	US40390494	2023-04-15
Power sensor	Agilent	E9322A	MY44420219	2023-04-15
Power amplifier	Micotop	MPA-80-1000-250	MPA2112426	2023-04-15
Power amplifier	Micotop	MPA-1000-6000-100	MPA2201013	2023-04-15
Stacked Log. Periodic Antenna	Schwarzbeck	STLP 9129	201	N/A
Field strength probe	PMM	EP601	811ZX10673	2023-04-17
RF Switch	Emtrace	SW X4	/	N/A
Test Software	Emtrace	EM 3	V1.2.1	N/A



EFT				⚙
Burst Tester	3C test	EFT 500T	ES027000120015	2023-11-13
Coupling Clamp	3C test	CCC 100	CCC 20092269	2023-11-13
Surge				⚙
Surge simulator	3C test	CWS 600CT	ES058000920005	2023-11-13
Three phases CDN	3C test	SPN 3832T	ES0911910	2023-11-13
CDN for unshielded symmetrical high-speed Telecom cable	3C test	CDN405T8A	ES064001220010	2023-11-13
CDN for Telecom cable	3C test	CDN405M40-5	ES1071910	2023-11-13
Radio-Frequency Continuous Conducted (CS)				⚙
Conducted Immunity Test System	3C test	CST 1075	ES096000120008	2023-11-13
6dB Attenuator	3C test	DTC75-6	ES095000120006	2023-11-13
Single phase CDN	3C test	CDN M2M3	ES064002620007	2023-11-13
Three phases CDN	3C test	CDN M5-16	ES064003320004	2023-11-13
Calibration Set	3C test	CDN 100KIT	ES064002820016	2023-11-13
Calibration Set	3C test	EM CL100KIT	EM C20032816	2023-11-13
EM-Clamp	3C test	EM CL100	EM C20032811	2023-11-13
Test software	EMC-s	/	V1.4.0.54	/
Voltage Dips and Interruptions				⚙
Power failure simulator	3C test	PFS 2216SD	ES049001220003	2023-11-13

Note: ⚙ Used ● Not Used



2 - SUMMARY OF TEST RESULTS

Emission (EN 301 489-1, EN 301 489-52)		
Standard	Test Type	Result
EN55032: 2015/A11:2020	Conducted Emission Test (0.15MHz~30MHz)	Pass
	Radiated Emission Test (30MHz~1GHz)	Pass
	Radiated Emission Test (1GHz ~ 6GHz)	Pass Note (2)
EN IEC 61000-3-2: 2019	Harmonic Current Emission	N/A
EN 61000-3-3: 2013/A1: 2019	Voltage Fluctuations & Flicker	Pass
Immunity (EN 301 489-1, EN 301 489-52)		
Standard	Test Type	Result
EN 61000-4-2: 2009	Electrostatic discharge immunity test	Pass
EN IEC 61000-4-3:2020	Radiated, radio-frequency, electromagnetic field immunity test	Pass
EN 61000-4-4: 2012	Electrical fast transient / burst immunity test	Pass
EN 61000-4-5: 2014/A1: 2017	Surge immunity test	Pass
EN 61000-4-6: 2014	Conducted disturbances, induced by radio-frequency fields immunity test	Pass
EN 61000-4-8: 2012	Power frequency magnetic field	N/A Note (4)
EN IEC 61000-4-11: 2020	Voltage dips, short interruptions and voltage variations immunity test	Pass
Note: (1) "N/A" denotes test was not applicable in this Test Report. (2) The EUT's max operating frequency is exceeds 108MHz, so the test will be performed. (3) For equipment with a rated power of ≤ 75 W, other than lighting equipment, no limits are specified in this edition of the standard. (4) Applicable only to EUT containing devices susceptible to magnetic fields, such as CRT monitors, Hall elements, electrodynamic microphones, magnetic field sensors, etc.		



3.- CONDUCTED EMISSION FROM THE AC MAINS POWER PORT

3.1 Limit

EN 55032				
Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

3.2 Test Procedure


The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

3.3 Test Setup

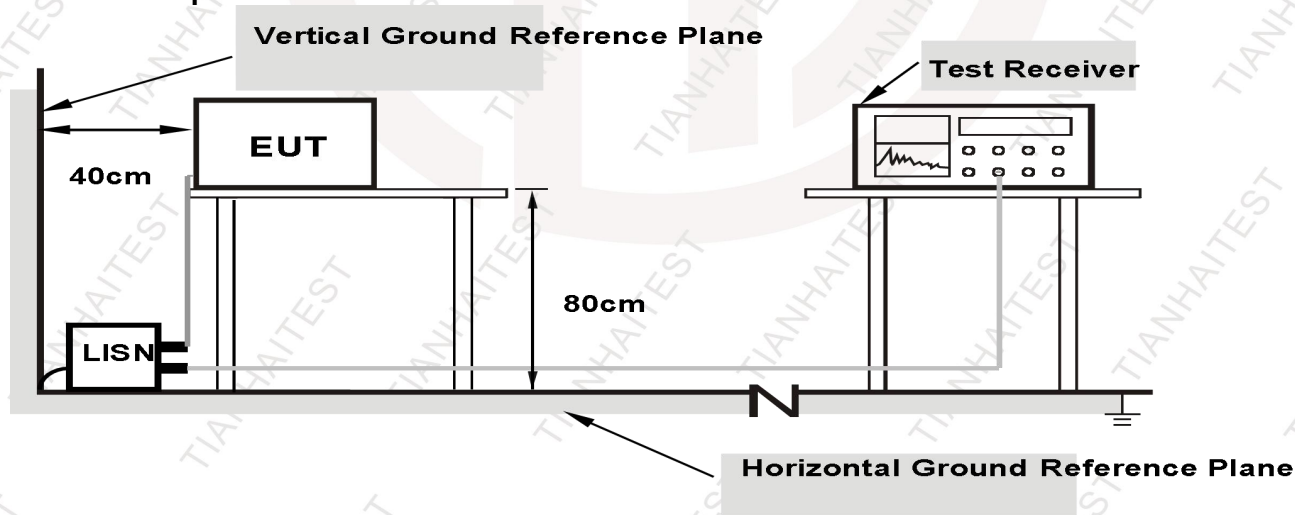

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm

3.4 Test Results

Please refer to following:




EUT : Wireless Gateway
M/N : SWG-3008
Operation Mode : Mode 2
Test Voltage : DC 12V/3A
Phase : L1
Temperature (°C) : 21 Relative Humidity (%) : 48 Atmospheric Pressure(mbar) : 1015

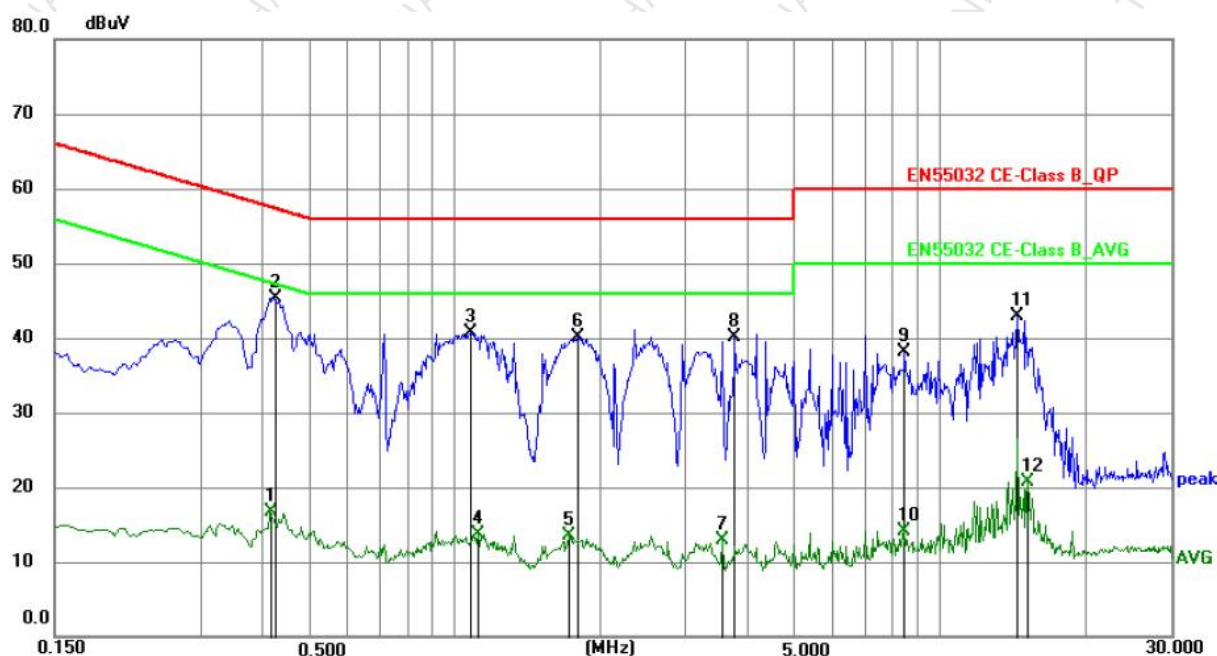

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4155	6.36	10.30	16.66	47.54	-30.88	AVG	P
2 *	0.4245	35.03	10.30	45.33	57.36	-12.03	QP	P
3	1.0770	30.37	10.39	40.76	56.00	-15.24	QP	P
4	1.1174	3.40	10.40	13.80	46.00	-32.20	AVG	P
5	1.7250	3.02	10.44	13.46	46.00	-32.54	AVG	P
6	1.7925	29.70	10.45	40.15	56.00	-15.85	QP	P
7	3.5700	2.53	10.44	12.97	46.00	-33.03	AVG	P
8	3.7860	29.65	10.44	40.09	56.00	-15.91	QP	P
9	8.4830	27.68	10.50	38.18	60.00	-21.82	QP	P
10	8.4830	3.64	10.50	14.14	50.00	-35.86	AVG	P
11	14.5090	32.27	10.70	42.97	60.00	-17.03	QP	P
12	15.1795	9.91	10.72	20.63	50.00	-29.37	AVG	P



EUT : Wireless Gateway
M/N : SWG-3008
Operation Mode : Mode 2
Test Voltage : DC 12V/3A
Phase : N
Temperature (°C) : 21 Relative Humidity (%) : 48 Atmospheric Pressure(mbar) : 1015

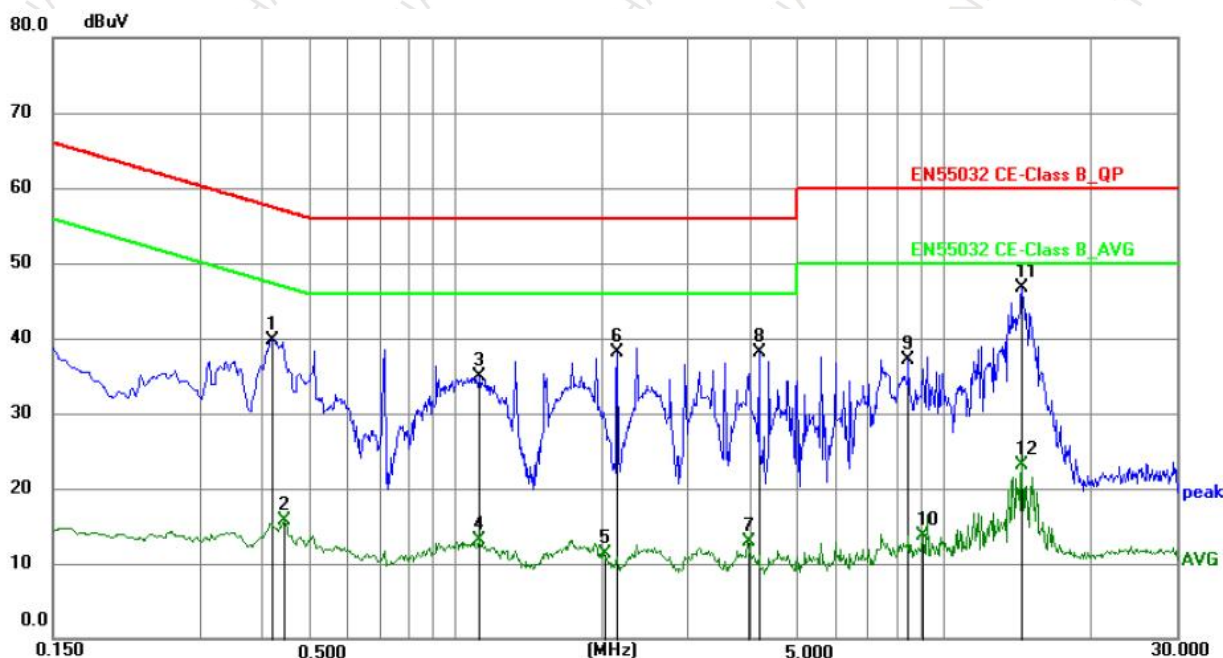

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4200	29.40	10.31	39.71	57.45	-17.74	QP	P
2	0.4470	5.40	10.32	15.72	46.93	-31.21	AVG	P
3	1.1174	24.49	10.40	34.89	56.00	-21.11	QP	P
4	1.1174	2.66	10.40	13.06	46.00	-32.94	AVG	P
5	2.0130	0.92	10.48	11.40	46.00	-34.60	AVG	P
6	2.1480	27.58	10.47	38.05	56.00	-17.95	QP	P
7	3.9795	2.32	10.50	12.82	46.00	-33.18	AVG	P
8	4.1865	27.67	10.49	38.16	56.00	-17.84	QP	P
9	8.4830	26.58	10.56	37.14	60.00	-22.86	QP	P
10	9.0860	3.20	10.58	13.78	50.00	-36.22	AVG	P
11 *	14.5045	36.10	10.70	46.80	60.00	-13.20	QP	P
12	14.5045	12.35	10.70	23.05	50.00	-26.95	AVG	P





4 - RADIATED DISTURBANCES

4.1 Limit

EN 55032		
Below 1GHz		
Frequency (MHz)	Class A (at 3m)	Class B (at 3m)
	Quasi-Peak dBuV/m	Quasi-Peak dBuV/m
30 – 230	50	40
230 – 1000	57	47
Above 1GHz		
Frequency MHz	Field Strengths Limits dB(μV)/m	Detector
1000~3000	70	Peak
1000~3000	50	Average
3000~6000	74	Peak
3000~6000	54	Average

4.2 Test Setup

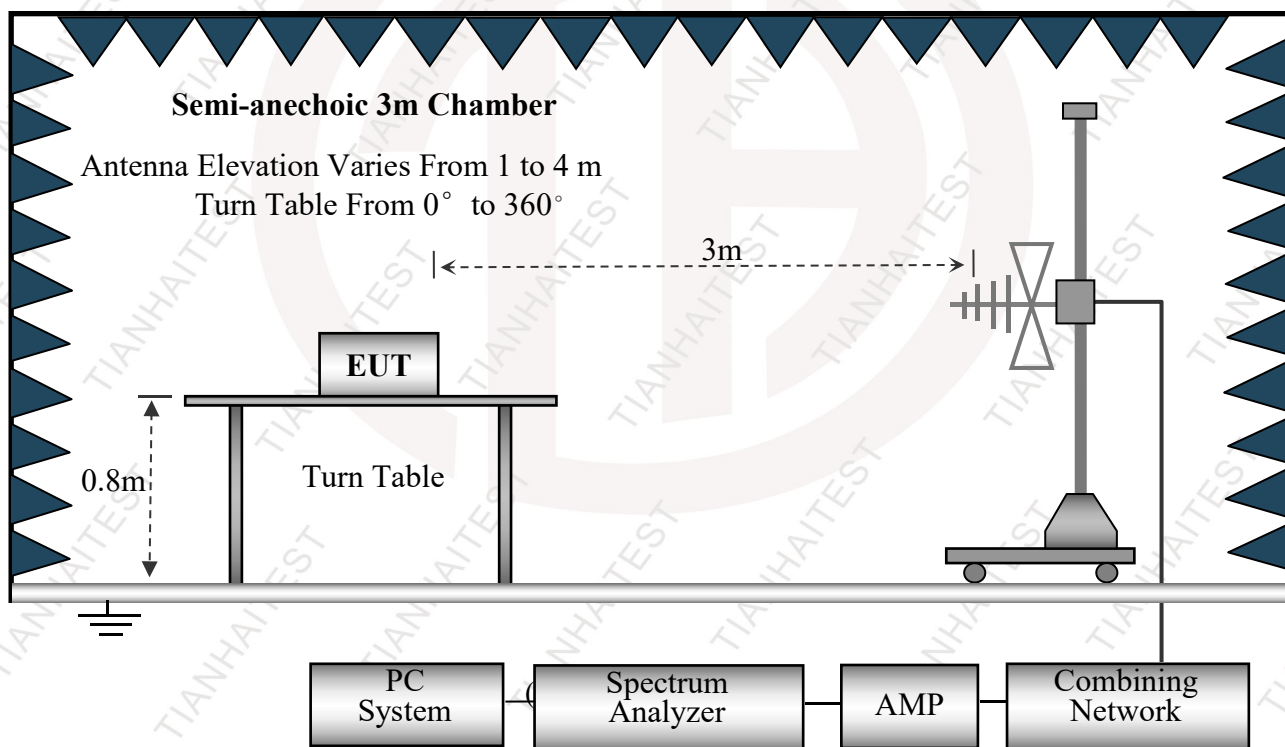

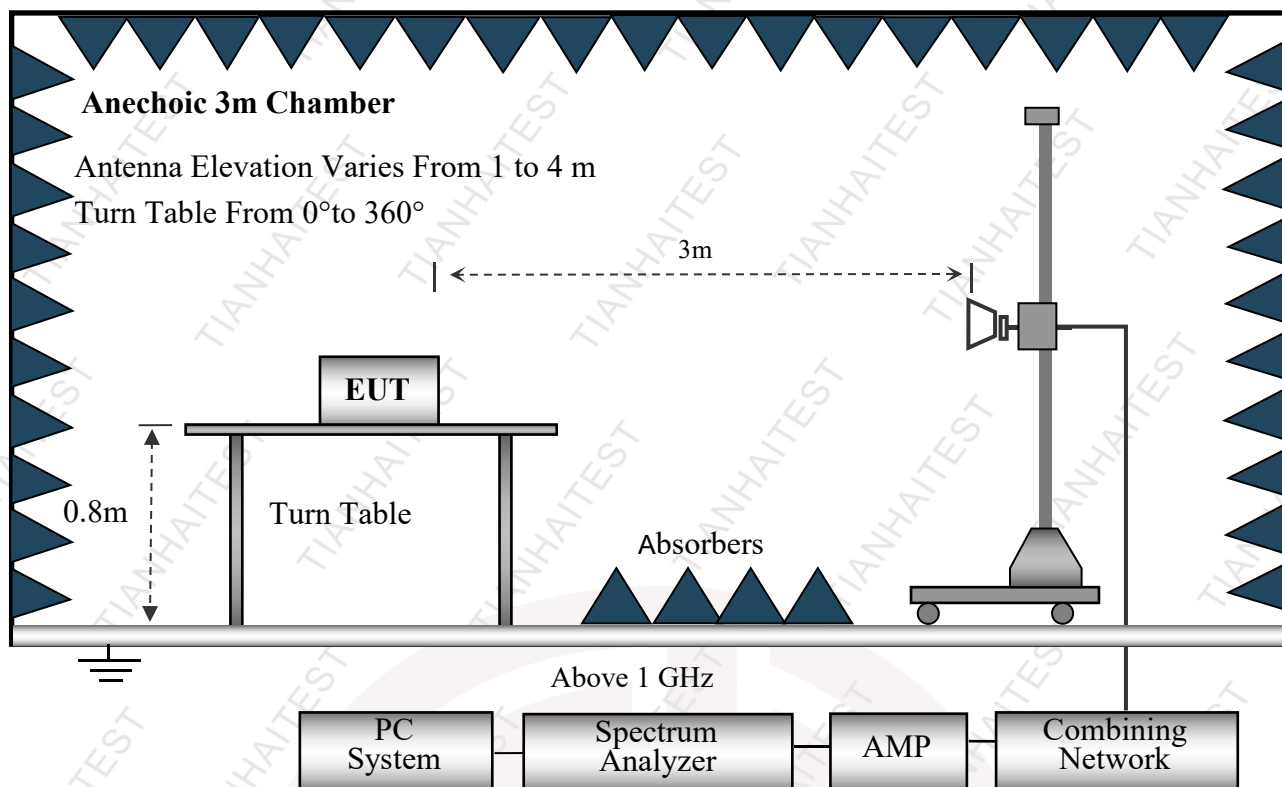

4.3 Test Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.




4.4 Test Result

Please refer to following:

Below 1GHz Data

EUT : Wireless Gateway
M/N : SWG-3008
Operation Mode : Mode 2
Test Voltage : DC 12V/3A
Polarizations : Horizontal
Temperature (°C) : 20 Relative Humidity (%) : 44 Atmospheric Pressure(mbar) : 1015

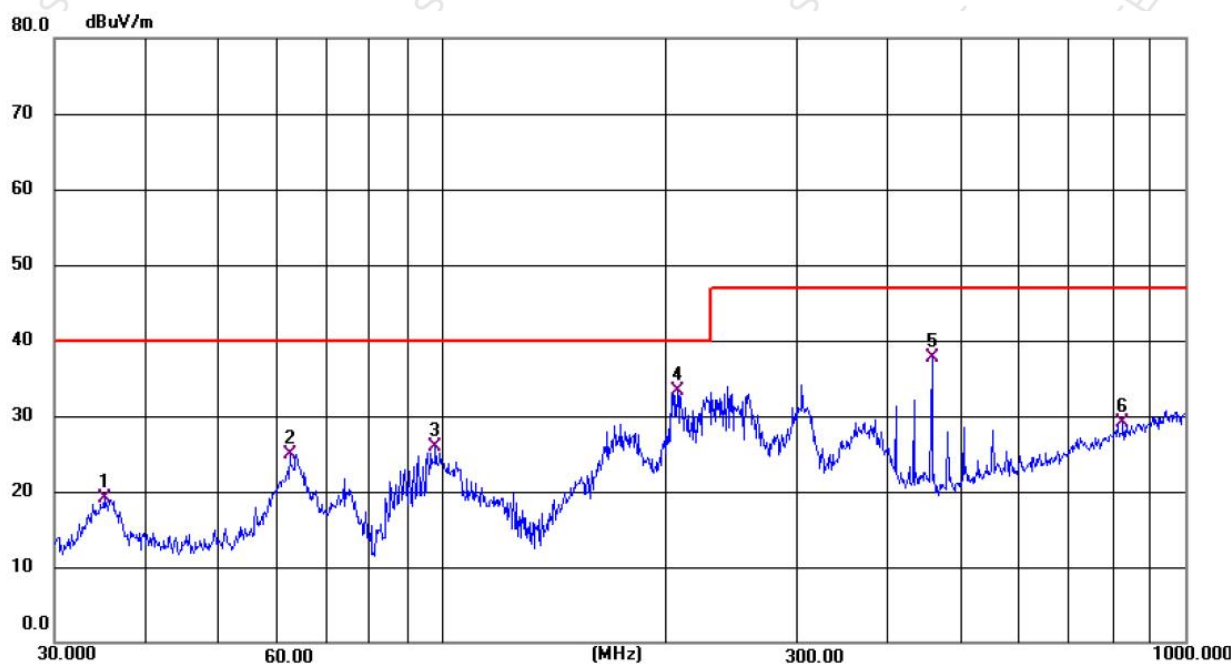


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.0663	34.56	-15.50	19.06	40.00	-20.94	QP
2	62.3657	40.99	-16.05	24.94	40.00	-15.06	QP
3	98.0043	44.58	-18.64	25.94	40.00	-14.06	QP
4 *	207.4497	51.43	-18.03	33.40	40.00	-6.60	QP
5	455.9858	48.07	-10.42	37.65	47.00	-9.35	QP
6	827.2033	32.43	-3.28	29.15	47.00	-17.85	QP



Below 1GHz Data

EUT : Wireless Gateway
M/N : SWG-3008
Operation Mode : Mode 2
Test Voltage : DC 12V/3A
Polarizations : Vertical

Temperature (°C) : 20 Relative Humidity (%) : 44 Atmospheric Pressure(mbar) : 1015

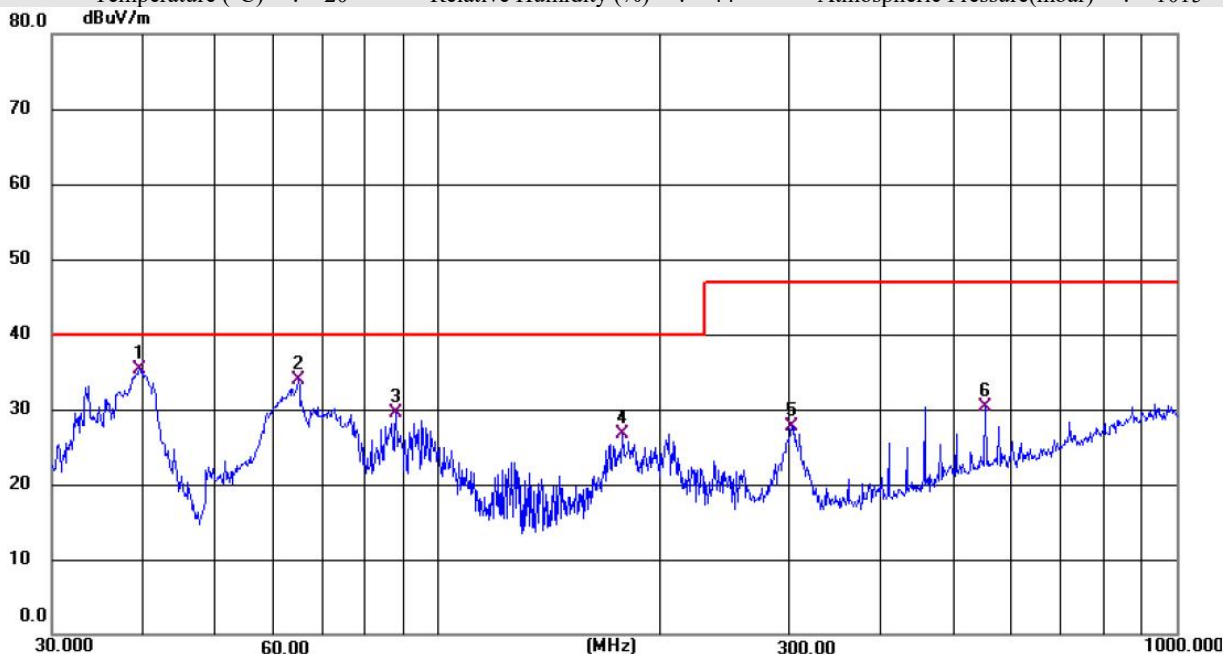

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	39.4995	50.04	-14.75	35.29	40.00	-4.71	QP
2	64.8524	50.66	-16.78	33.88	40.00	-6.12	QP
3	87.7709	49.41	-19.88	29.53	40.00	-10.47	QP
4	178.1327	43.69	-17.05	26.64	40.00	-13.36	QP
5	302.7994	42.30	-14.61	27.69	47.00	-19.31	QP
6	552.0116	38.74	-8.37	30.37	47.00	-16.63	QP



Above 1GHz Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode 1


Test Voltage : DC 12V/3A

Polarizations : Horizontal

Temperature (°C) : 20

Relative Humidity (%) : 44

Atmospheric Pressure(mbar) : 1015

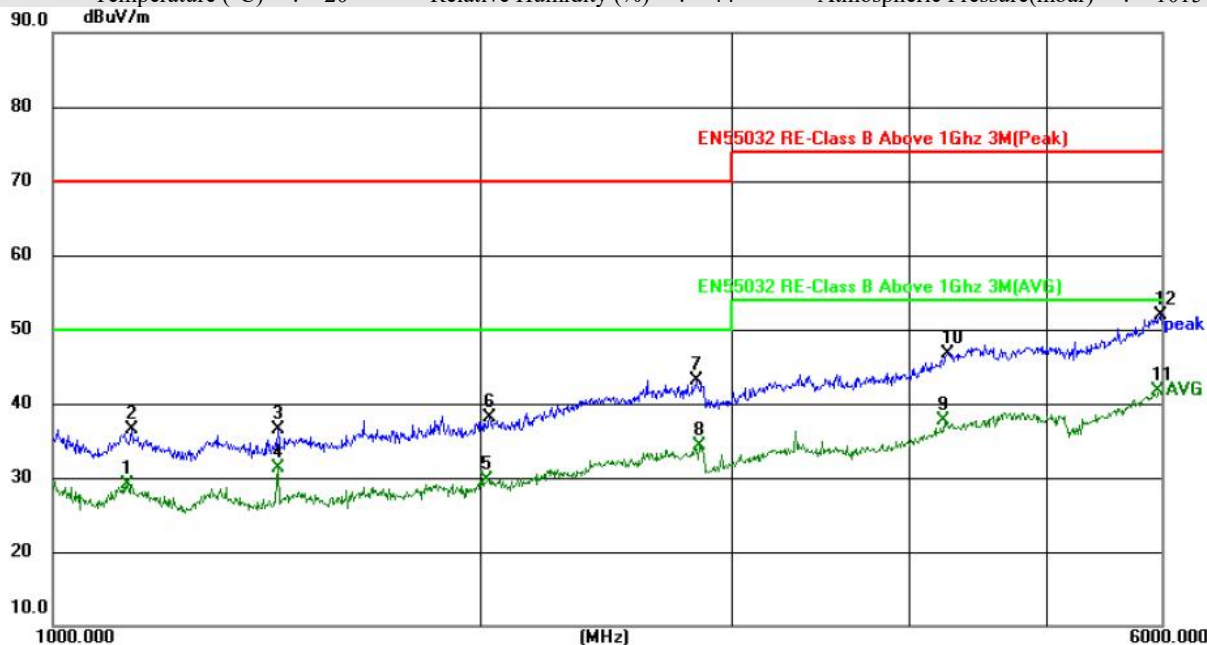

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1128.157	37.03	-8.01	29.02	50.00	-20.98	AVG
2	1139.330	44.38	-7.96	36.42	70.00	-33.58	peak
3	1439.971	43.45	-6.90	36.55	70.00	-33.45	peak
4	1439.971	38.26	-6.90	31.36	50.00	-18.64	AVG
5	2022.150	33.98	-4.23	29.75	50.00	-20.25	AVG
6	2029.228	42.32	-4.19	38.13	70.00	-31.87	peak
7	2834.367	43.91	-0.85	43.06	70.00	-26.94	peak
8	2853.475	35.13	-0.78	34.35	50.00	-15.65	AVG
9	4233.349	34.31	3.33	37.64	54.00	-16.36	AVG
10	4251.593	43.29	3.38	46.67	74.00	-27.33	peak
11 *	5996.775	32.02	9.70	41.72	54.00	-12.28	AVG
12	5997.850	42.14	9.70	51.84	74.00	-22.16	peak



Above 1GHz Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode 1


Test Voltage : DC 12V/3A

Polarizations : Vertical

Temperature (°C) : 20

Relative Humidity (%) : 44

Atmospheric Pressure(mbar) : 1015

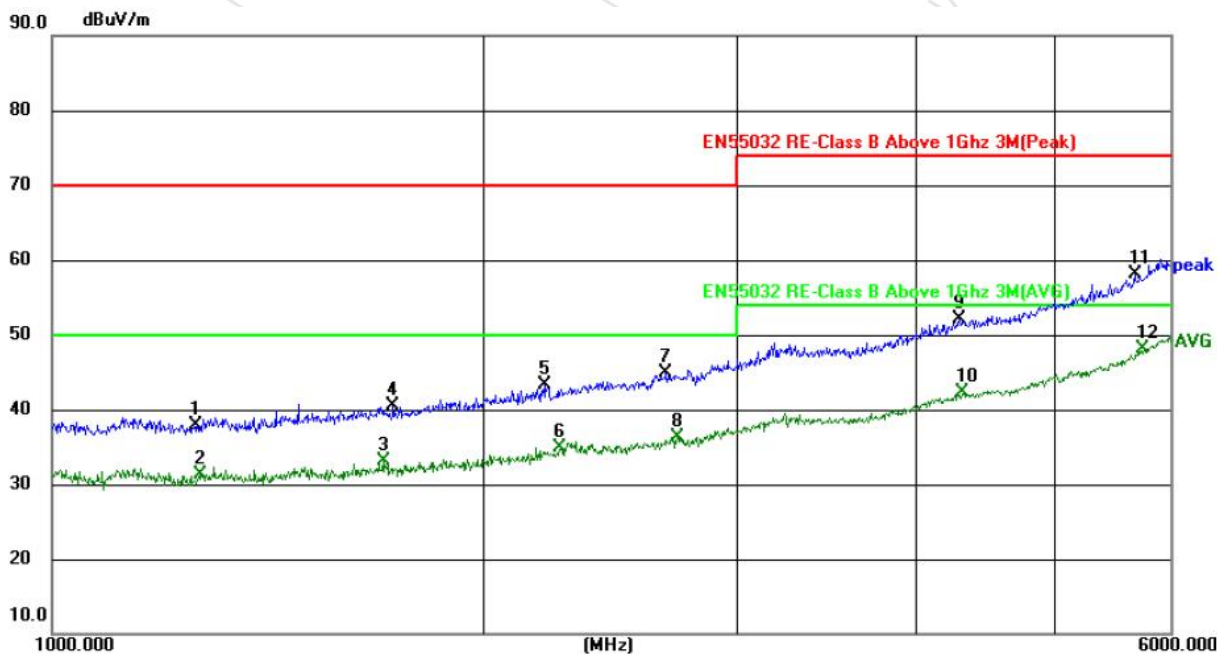

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1264.668	45.40	-7.52	37.88	70.00	-32.12	peak
2	1269.664	38.87	-7.51	31.36	50.00	-18.64	AVG
3	1703.509	38.75	-5.72	33.03	50.00	-16.97	AVG
4	1729.032	46.19	-5.61	40.58	70.00	-29.42	peak
5	2209.693	46.74	-3.42	43.32	70.00	-26.68	peak
6	2261.564	38.16	-3.21	34.95	50.00	-15.05	AVG
7	2680.025	46.30	-1.47	44.83	70.00	-25.17	peak
8	2727.500	37.64	-1.28	36.36	50.00	-13.64	AVG
9	4286.396	48.70	3.47	52.17	74.00	-21.83	peak
10	4318.387	38.73	3.57	42.30	54.00	-11.70	AVG
11	5671.753	49.96	8.14	58.10	74.00	-15.90	peak
12 *	5762.407	39.48	8.58	48.06	54.00	-5.94	AVG




5 - HARMONIC CURRENT EMISSION

5.1 Test Standard

ETSI 301 489-1 / (EN IEC 61000-3-2)

5.2 Test Setup

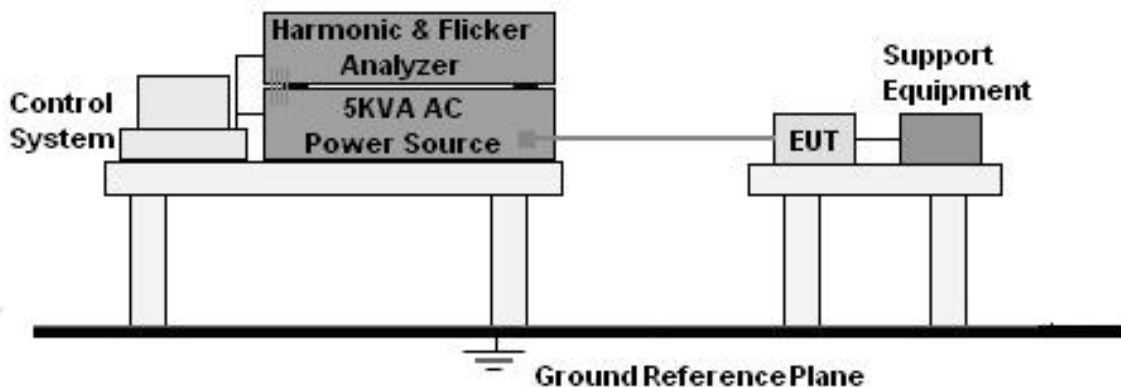

5.3 Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

5.4 Operating Condition of EUT

Standard used:	EN/IEC 61000-3-2 A14 (2006) Quasi-stationary - Equipment class A
Observation time:	150s
E. U. T	Wireless Gateway
M/N	SWG-3008
Operation Mode	Normal Working

5.5 Test Result

Please refer to following:

There is no need for Harmonic current test to be performed on this product (rated power is less than 75 W) in accordance with EN 61000-3-2.

For further details, please refer to Clause 7 of EN 61000-3-2 which states:

“For the following categories of equipment, limits are not specified in this standard:
- equipment with a rated power of 75 W or less, other than lighting equipment.”




6 - VOLTAGE FLUCTUATIONS & FLICKER

6.1 Limit

ETSI 301 489-1 / (EN 61000-3-3)	
Test Items	Limit
Pst	1.0
dc	3.3%
Tmax	4.0%
dt	Not exceed 3.3% for 500ms

6.2 Test Setup

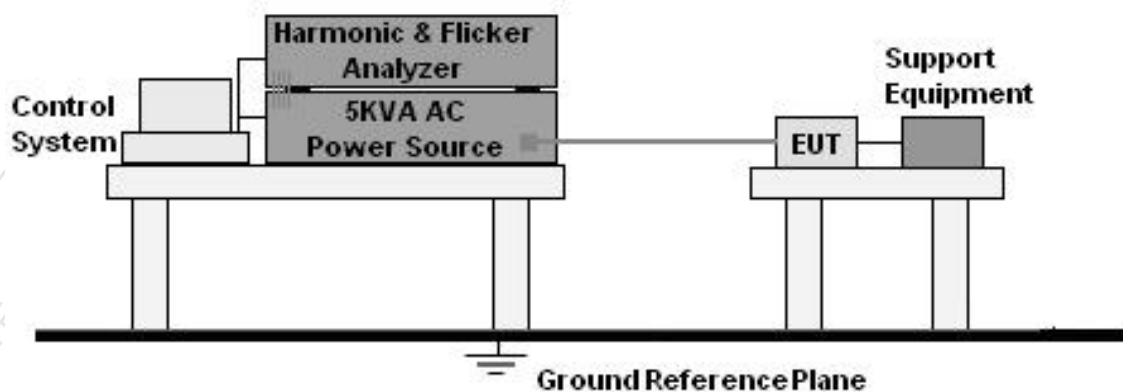

6.3 Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

6.4 Test Result

Please refer to following:

Pass

	Pst	dc(%)	Dmax (%)	d(t) >3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading	0.091	0.405	0.692	0



7 - GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST

EN 55032 General Performance Criteria	
Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended. For audio output device: The measured acoustic interference ratio and/or the measured electrical interference during the test shall be -20dB or better(see note1)
Criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

EN 301 489-52 Performance criteria		
Criteria	During test	After test
A	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of stored data.
B	May show loss of function	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.
Note: Operate as intended during the test allows a level of degradation in accordance with a and b. (a) For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %. (b) For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.		

8.1 Test Setup



ETSI EN 301 489-17, EN 61000-4-2

8.3 Severity Levels and Performance Criterion

Severity Level: 3 / Air Discharge: $\pm 8\text{kV}$

Level: 2 / Contact Discharge: $\pm 4\text{kV}$

Performance criterion: B

8.4 Test Procedure

Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Contact Discharge:

All the procedure shall be same as Air Discharge. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

Indirect discharge for horizontal coupling plane:

At least 25 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the



front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

Indirect discharge for vertical coupling plane:

At least 25 singles discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m×0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.5 Test Result


Please refer to following:

Electrostatic Discharge Test Data			
EUT	: Wireless Gateway		
M/N	: SWG-3008		
Operation Mode	: Mode 1		
Test Voltage	: DC 12V/3A		
Temperature (°C)	: 21.2	Relative Humidity (%)	: 50
		Atmospheric Pressure(mbar)	: 1015
Location	Test Level /kV	Remark	Result (Pass/Fail)
HCP	±4kV	A	Pass
VCP	±4kV	A	Pass
screw/metal	±4kV	A	Pass
Charging port	±4kV	A	Pass
USB port	±4kV	A	Pass
Headphone plug	±8kV	A	Pass
TF/SIM card slot	±8kV	A	Pass
Vent	±8kV	A	Pass
Note: No obvious change of function was found after the test.			



9 - RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1 Test Setup

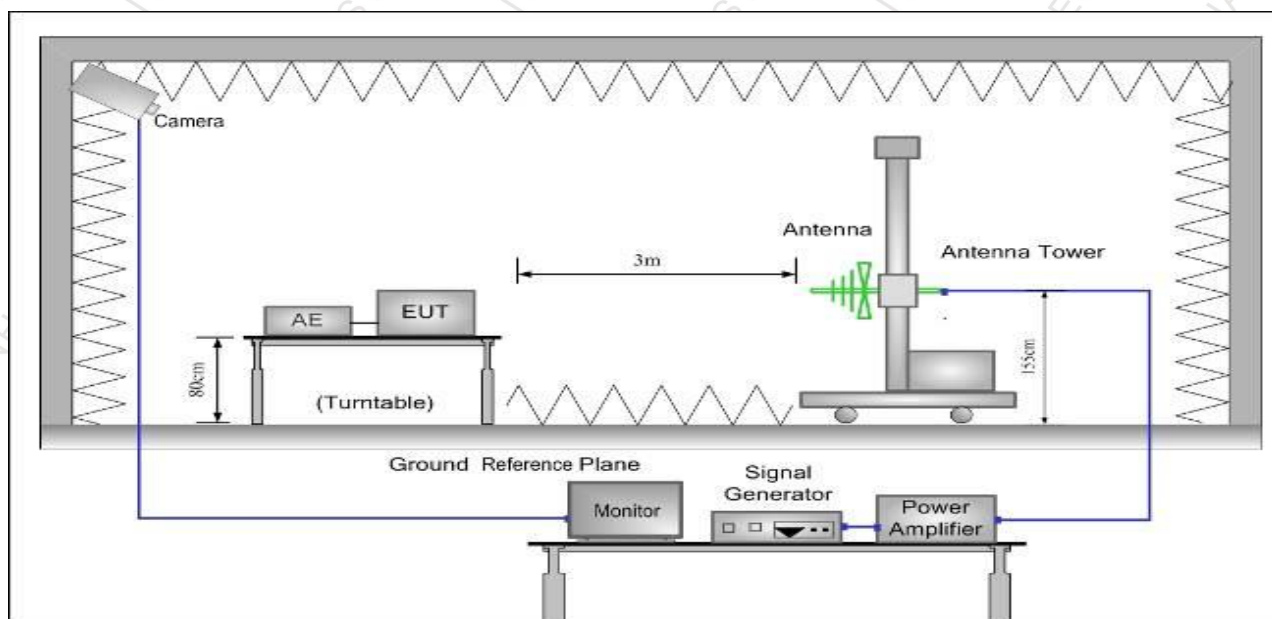

9.2 Test Standard

ETSI EN 301 489-17, EN IEC 61000-4-3

9.3 Severity Levels and Performance Criterion

Severity Level 2, 3V/m

Performance criterion: B

9.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

All the scanning conditions are as follows:

Condition of Test	Remarks
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Modulated
Scanning Frequency	80 – 6000 MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	1 Sec.



9.5 Test Result

Please refer to following:

EN 55035 R/S Test Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode 2

Test Voltage : DC 12V/3A

Temperature (°C) : 23.6

Relative Humidity (%) : 57

Atmospheric Pressure(mbar) : 1015

Frequency Range	Field Strength (V/m)	Position	Polarization of Antenna	Result (Pass/Fail)
80 - 1000MHz	3	Front, Right, Back, Left	Horizontal	Pass
80 - 1000MHz	3	Front, Right, Back, Left	Vertical	Pass
1800MHz	3	Front, Right, Back, Left	Horizontal	Pass
1800MHz	3	Front, Right, Back, Left	Vertical	Pass
2600MHz	3	Front, Right, Back, Left	Horizontal	Pass
2600MHz	3	Front, Right, Back, Left	Vertical	Pass
3500MHz	3	Front, Right, Back, Left	Horizontal	Pass
3500MHz	3	Front, Right, Back, Left	Vertical	Pass
5000MHz	3	Front, Right, Back, Left	Horizontal	Pass
5000MHz	3	Front, Right, Back, Left	Vertical	Pass

Note:

No loss of function was observed.

ETSI EN 301 489-52 R/S Test Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode 2

Test Voltage : DC 3.8V from Battery

Temperature (°C) : 23.6

Relative Humidity (%) : 57

Atmospheric Pressure(mbar) : 1015

Frequency Range	Field Strength (V/m)	Position	Polarization of Antenna	Result (Pass/Fail)
80 - 6000MHz	3	Front, Right, Back, Left	Horizontal	Pass
80 - 6000MHz	3	Front, Right, Back, Left	Vertical	Pass


Note:

No loss of function was observed.



10 - ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

10.1 Test Setup

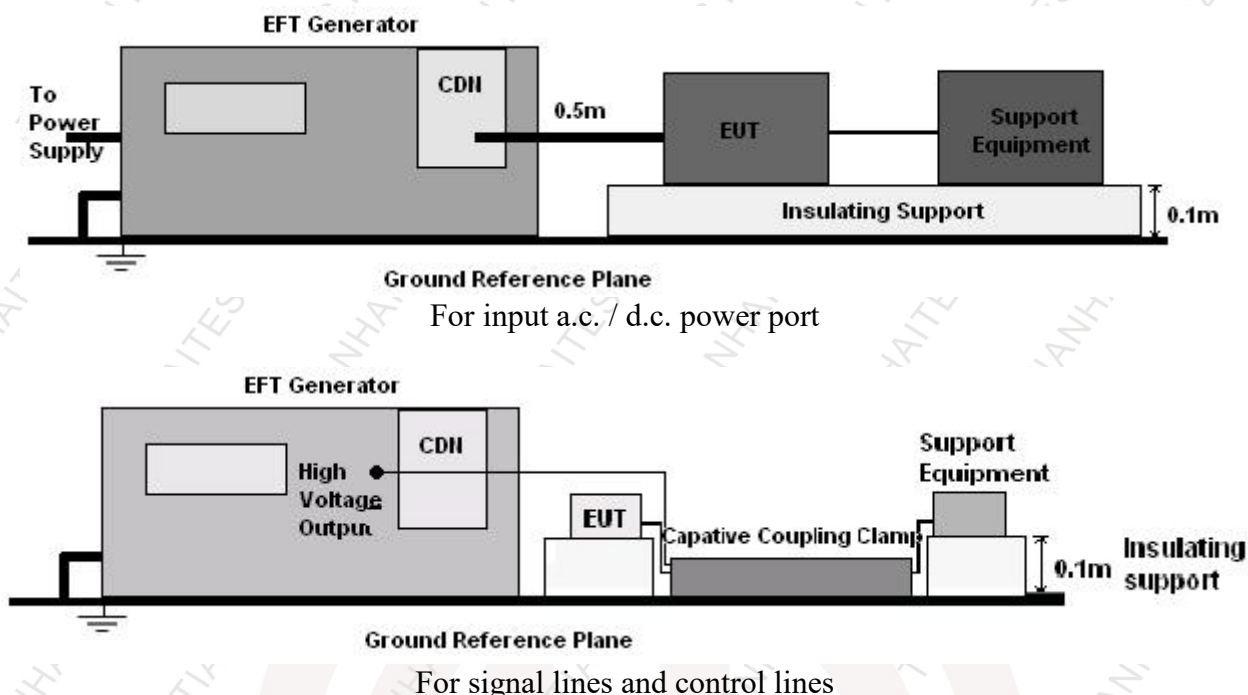

10.2 Test Standard

ETSI EN 301 489-17, EN 61000-4-4

10.3 Severity Levels and Performance Criterion

Severity Level 2 at 1kV, Pulse Rise time & Duration: 5 ns / 50 ns

Performance criterion: B

10.4 Test Procedure

EUT shall be placed 0.8m high above the ground reference plane which is a min. 1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m

For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

10.5 Test Result

Please refer to following:



EFT Test Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode 2

Test Voltage : DC 12V/3A

Temperature (°C) : 21.2

Relative Humidity (%) : 50

Atmospheric Pressure(mbar) : 1015

Conductor	Test Level /kV	Remark	Result (Pass/Fail)
L	±1kV	A	Pass
N	±1kV	A	Pass
L-N	±1kV	A	Pass


Note:

No loss of function was observed.



11 - SURGE IMMUNITY TEST

11.1 Test Setup

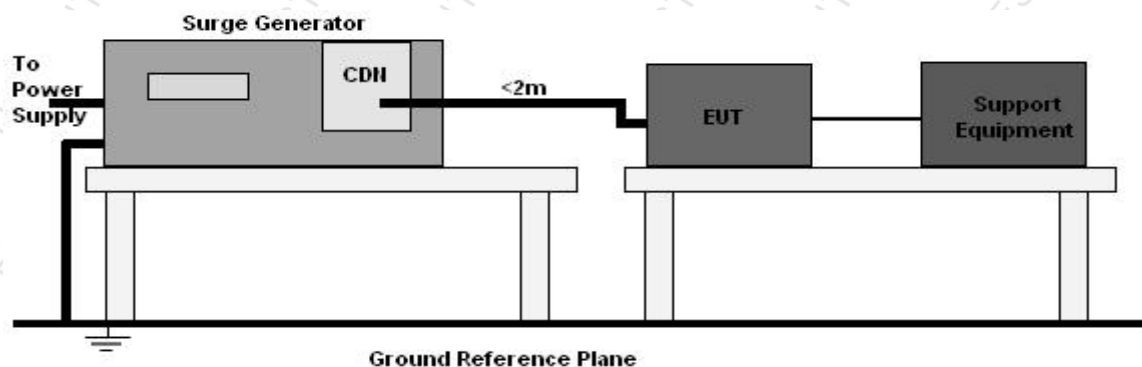

11.2 Test Standard

ETSI EN 301 489-17, EN 61000-4-5

11.3 Severity Levels and Performance Criterion

Severity Level: Line to Line, Level 2 at 1KV;
Severity Level: Line to Earth, Level 3 at 2KV.
Performance criterion: B

11.4 Test Procedure

- 1) Set up the EUT and test generator as shown on section 11.1
- 2) For line to line coupling mode, provide a 1KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Repeat procedure 2) to 4) except the open-circuit test voltage change from 1KV to 2KV for line to earth coupling mode test.
- 6) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.5 Test Result

Please refer to following:



Surge Test Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode 2

Test Voltage : DC 12V/3A

Temperature (°C) : 21.2

Relative Humidity (%) : 50

Atmospheric Pressure(mbar) : 1015

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (kV)	Result (Pass/Fail)
L-N	±	0°	10	1.0	Pass
	±	90°	10	1.0	Pass
	±	180°	10	2.0	Pass
	±	270°	10	2.0	Pass
L - PE	±	0°	10	2.0	Pass
	±	90°	10	2.0	Pass
	±	180°	10	2.0	Pass
	±	270°	10	2.0	Pass
N - PE	±	0°	10	2.0	Pass
	±	90°	10	2.0	Pass
	±	180°	10	2.0	Pass
	±	270°	10	2.0	Pass
Signal Line	±	/	/	/	/


Note:

No loss of function was observed.



12 - INJECTED CURRENTS SUSCEPTIBILITY TEST

12.1 Test Setup

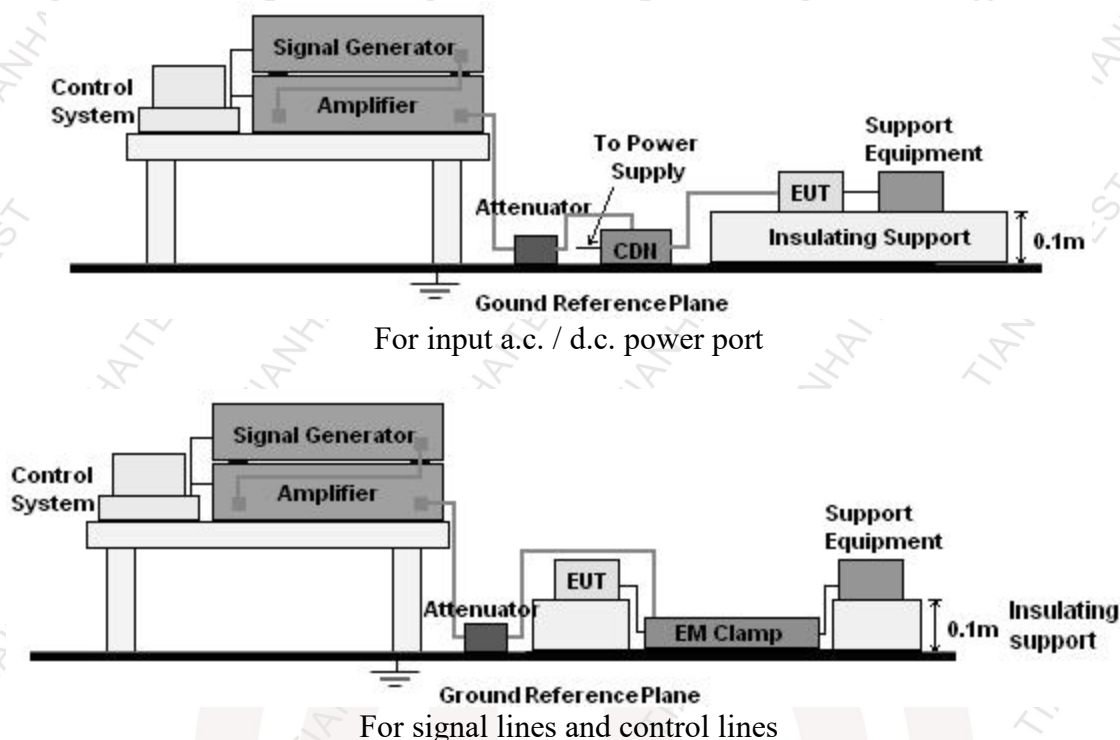

12.2 Test Standard

ETSI EN 301 489-17, EN 61000-4-6

12.3 Severity Levels and Performance Criterion

Severity Level 2: 3V (rms), 150KHz - 80MHz

Performance criterion: A

12.4 Test Procedure

- 1) Set up the EUT, CDN and test generator as shown on section 12.1
- 2) Let EUT work in test mode and measure.
- 3) The EUT and supporting equipments are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane at above 0.1-0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.



12.5 Test Result

Please refer to following:

EN 55035 CS Test Data

EUT : Wireless Gateway
M/N : SWG-3008
Operation Mode : Mode 1
Test Voltage : DC 12V/3A
Temperature (°C) : 25 Relative Humidity (%) : 54 Atmospheric Pressure(mbar) : 1015

Frequency Range	Injected Position	Test Level (r.m.s.)	Result (Pass/Fail)
0.15 - 10MHz	AC Mains	3	Pass
10 - 30MHz		3 - 1	Pass
30 - 80MHz		1	Pass

Note:
No loss of function was observed.

ETSI EN 301 489-52 CS Test Data

EUT : Wireless Gateway
M/N : SWG-3008
Operation Mode : Mode 1
Test Voltage : DC 3.8V from Battery
Temperature (°C) : 25 Relative Humidity (%) : 54 Atmospheric Pressure(mbar) : 1015


Frequency Range	Injected Position	Test Level (r.m.s.)	Result (Pass/Fail)
0.15 - 80MHz	AC Line	3	Pass
/		/	
/		/	
/	Signal Line	/	/
/		/	/
/		/	/

Note:
No loss of function was observed.



13 - VOLTAGE DIPS AND INTERRUPTIONS TEST

13.1 Test Setup

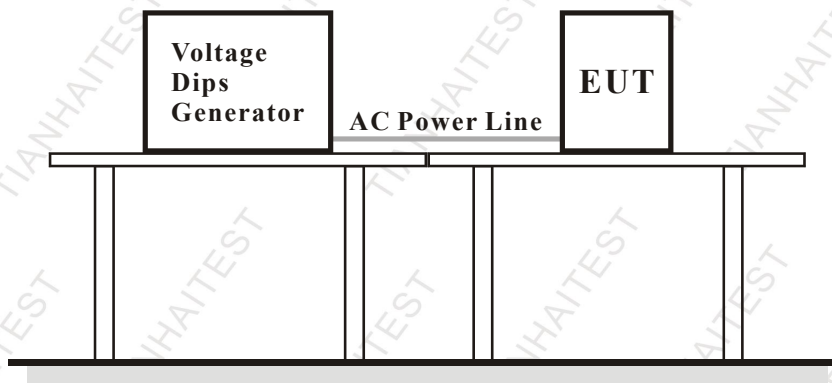

13.2 Test Standard

ETSI EN 301 489-17, EN IEC 61000-4-11

13.3 Severity Levels and Performance Criterion

Input and Output AC Power Ports.
Voltage Dips.
Voltage Interruptions.

Environmental Phenomena	Test Specification	Units	Performance Criterion
Voltage Dips	100 0.5	% Reduction period	B
	100 1	% Reduction period	B
	30 25	% Reduction period	C
Voltage Interruptions	100 250	% Reduction period	C

13.4 Test Procedure

- 1) Set up the EUT and test generator as shown on section 14.1
- 2) The interruption is introduced at selected phase angles with specified duration. There is a 3mins minimum interval between each test event.
- 3) After each test a full functional check is performed before the next test.
- 4) Repeat procedures 2 & 3 for voltage dips, only the level and duration is changed.
- 5) Record any degradation of performance.

13.5 Test Result

Please refer to following:



Voltage Dips & Short Interruptions Test Data

EUT : Wireless Gateway

M/N : SWG-3008

Operation Mode : Mode

Test Voltage : DC 12V/3A

Temperature (°C) : 21.2

Relative Humidity (%) : 50

Atmospheric Pressure(mbar) : 1015

Test Level %UT	Voltage Dips %UT	Duration (in period) 50Hz/60Hz	Phase Angle	Performance Criterion	Result (Pass/Fail)
0	100	0.5P	0°- 360°	B	Pass
0	100	1P	0°-360°	B	Pass
70	30	25P	0°-360°	B	Pass
0	100	250	0°	C	Pass

Note:

Means EUT Shut down, lost function. It should be recoverable by operator.



APPENDIX A - EUT PHOTOGRAPHS













*****END OF THE REPORT*****